

**UTILITY PATENT APPLICATION
TRANSMITTAL UNDER 37 CFR 1.53(b)**

ATTORNEY DOCKET 78515DMW

To: Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Express Mail Label No.

EL267110241US

Date: 9/28/99

**IMAGE PROCESSING FOR IMPROVEMENT OF
COLOR REGISTRATION IN DIGITAL IMAGES**

First Named Inventor (or Application Identifier):

Peter D. Burns

Enclosed are:

1. ☒ Specification
2. ☐ 10 Sheet(s) of drawing(s)
3. ☒ Information Disclosure Statement Under 37 CFR 1.97.
4. Combined Declaration for Patent Application and Power of Attorney:
 - 4a. ☒ New
 - 4b. ☐ Copy from a prior application (37 CFR 1.63(d) (for continuation/divisional with Box 11 completed)
5. ☐ Incorporation by Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☒ Assignment of the invention to **Eastman Kodak Company**
7. ☐ Certified copy of a priority document.
8. ☐ Associate Power of Attorney
9. ☐ Deletion of Inventor(s).
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

10. ☒ If a 111A application prior to examination of the above-identified application, amend the specification at Page 1, after the title, by inserting the following:
--CROSS REFERENCE TO RELATED APPLICATION
Reference is made to and priority claimed from U.S. Provisional Application Serial No. 60/102,786, filed 02 October 1998, entitled IMAGE PROCESSING FOR IMPROVEMENT OF COLOR REGISTRATION IN DIGITAL IMAGES.

If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

11. ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: 2
12. ☒ Please address all written communications to Thomas H. Close, Patent Legal Staff, Eastman Kodak Company, 343 State Street, Rochester, NY 14650-2201.
Please Direct all telephone calls to David M. Woods at (716) 477-5256.

The filing fee has been calculated as shown below:

FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 760
TOTAL CLAIMS	23	- 20 =	3	x 18 = \$ 54
INDEPENDENT CLAIMS	2	- 3 =	0	x 78 = \$ 0
MULTIPLE DEPENDENT CLAIM PRESENTED			+ 260	\$0
			TOTAL	\$ 814

- ☒ Please charge my Eastman Kodak Company Deposit Account No. 05-0225 in the amount of \$ 814.

A duplicate copy of this sheet is enclosed

- ☒ The Assistant Commissioner is hereby authorized to charge any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Eastman Kodak Company Deposit Account No. 05-0225.

A duplicate copy of this sheet is enclosed.

David M. Woods/RGR

Telephone: (716) 477-5256
Facsimile: (716) 477-4646

David M. Woods
David M. Woods
Attorney for Applicants
Registration No. 27,171

09/28/99

09406882 " 092899

JC572 U.S. PTO

09/406882

09/28/99

PATENT APPLICATION BASED ON: Docket Number 78515DMW

Inventor(s): Peter D. Burns

Attorney: David M. Woods

Document ID: 78515DMW\DOCKETS\

IMAGE PROCESSING FOR IMPROVEMENT OF COLOR
REGISTRATION IN DIGITAL IMAGES

EASTMAN KODAK COMPANY

RESTRICTED INFORMATION

"Express Mail" mailing label number EL267110241US
Date of Deposit September 28, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to "Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231

Robin G. Reeves

(Typed or printed name of
person mailing paper or fee)

Robin G. Reeves

(Signature of person mailing paper or fee)

09/28/99

IMAGE PROCESSING FOR IMPROVEMENT OF COLOR
REGISTRATION IN DIGITAL IMAGES

FIELD OF THE INVENTION

5 The invention relates generally to the field of digital image processing, and in particular to the digital correction of misregistration in a sequence of different color, or other multi-record images captured of the same scene.

BACKGROUND OF THE INVENTION

10 The acquisition of digital color images by, e.g., a digital camera, a film scanner or a document scanner, results in several (usually three) stored color records. These records represent different spectral weightings of the image information. When a digital color image is displayed on a CRT or printed, these
15 color records supply the red, green and blue image information. The combination of the color records at each pixel across the image can give the viewer an impression of a color image, similar to that of the original scene or document.

 The recording of detail in a digital color image requires that the color records be detected and stored in register. By this we mean that the signals
20 stored as triplets of red, green and blue pixel values should indeed correspond to the sampled original image at the same locations. If a digital image is captured with misregistration between the color records, the color image displayed or printed from these records can exhibit a loss of sharpness (blur) or color distortion artifacts, particularly at the edges of objects in the scene. Extreme cases are
25 sometimes seen in color images printed in newspapers. In addition, the performance of any subsequent image processing step that relies on the color records being registered correctly, such as color metric transformation, image compression, and printing suffers when color misregistration is present.

 Color misregistration can have several sources. Chromatic
30 aberration in the optical path prior to image detection can cause the focal plane and image position to be a function of wavelength (see, e.g., E. Hecht, Optics, 2nd

662260 2889760

This 'lateral color' error can result in, e.g., a simple translation and/or a variation in optical magnification between the color records. For film or document

5 manufacturing tolerances can lead also to translation misregistration.

the input image color records are recorded on, e.g., different film separations.

10 locations using registration elements added to the border of the original film

records, or a mechanical registration prior to scanning. It is also possible to

15 with image detection and signal readout, requires measurement from the actual

between color records by the use of a technique based on acquiring an image of an

20 Prior art methods for bringing image color-records into registration

Such processes may be practiced by having an operator view the digital image

4,849,914, two separate areas on halftone separation film are scanned, where each

contain the same image feature (e.g., an edge or line). Image processing is

the shift and rotation necessary to bring the physical film separations into

30 the film separations into alignment for punching pin registration holes.

Digital image processing methods for re-registering color images also include estimating the amount of misregistration, followed by a correction step. In U.S. Patent No. 5,475,428, the color misregistration is detected using a correlation-type operation on the image data from a digital camera. The
5 correction step, also called resampling, is achieved first by shifting the image records for integer pixels, then by performing a bilinear interpolation for the remaining fractional values. Interpolation is also taught in U.S. Patent No. 5,325,190 for both time-sequence image records and color misregistration correction.

10 The application of digital Finite Impulse Response (FIR) filters in digital image processing is quite common, and done by a convolution operation (see, e.g., A.K. Jain, Fundamentals of Digital Image Processing, Prentice-Hall, pp. 244-260, 1989). The design of a digital filter for, say noise reduction or sharpening, results in a filter matrix (or matrices) of coefficients that are then used
15 in the convolution operation on the image data. The desired characteristics of an FIR filter are usually expressed in the Fourier transform domain in terms of a Modulation Transfer Function (MTF). The procedure is to design a filter (matrix) whose MTF approximates the desired response, with as small a size as possible. A large filter size (n by m matrix) implies a high computational cost.

20 The Discrete Fourier Transform (DFT) is a mathematical operation that allows the transformation of the filter matrix (in the image domain) to an equivalent MTF description in the frequency domain. It is natural to design FIR filters using the DFT, as shown, e.g., in S. K. Park and S. E. Reichenbach, *Proc. SPSE Annual Conf.*, pp. 242-244, 1990. The DFT, however, results in a complex
25 representation (with real and imaginary parts) of the filter operation. This implies that an FIR filter has both an MTF and a Phase Transfer Function (PTF). If the filter matrix is constrained to be symmetrical about its center (in two directions) this results in a linear-phase design. This implies that the filter PTF will introduce a simple image shift, which in most cases for digital images can be ignored.

30 There is a class of digital filters, however, that are designed specifically to have both a specified MTF and PTF. These are used in networks

09406883 092899

called parallel combinations of allpass subfilters (PCAS). These subfilters are designed to have a unity MTF and a given PTF. When used in combination, the net effect is a filter operation that has a designed (non-unity) MTF and approximately linear PTF (see, e.g., S. Lawson and M. Anderson, Signal Processing, 57: pp. 205-221, 1997). Notwithstanding such signal processing designs, current FIR filters used to process digital images are not designed for a desired phase response, nor for both desired phase and modulus responses. These filters, moreover, are not used or suggested for color misregistration correction.

10

SUMMARY OF THE INVENTION

The present invention is directed to overcoming one or more of the problems set forth above. Briefly summarized, according to one aspect of the present invention, a method for improving the wavelength dependent registration of digital images includes the steps of (a) detecting a similar feature in two or more digital records of the same original, (b) determining from the feature a shift due to misregistration of at least one of the digital records relative to another of the digital records, and (c) processing the shifted digital record(s) with a digital filter having a phase response that compensates for the shift, thereby providing a correction for the color misregistration between the wavelength dependent digital records.

20

The invention thus resides in a digital image processing method wherein an measurement of the translation error between, e.g., color records is computed from the actual acquired image. These translation errors are then used to directly design (or select from pre-computed), Finite Impulse Response (FIR) filters that will restore the image color registration. The designed FIR filters are consistent with the current practice of improving the sharpness of digital images by increasing certain spatial frequencies in the image during filtering. They are also consistent with low-pass filters used for noise reduction. The proposed filters accomplish this "sharpening" or "blurring" and color registration simultaneously.

25

This invention includes the application of color misregistration data to define a desired phase response of a digital FIR filter for each color-record

30

0940666 09239 653260 23390460

of the digital image, and the design of an FIR filter with both a desired modulus (MTF) response and a color-specific phase response. Thus, unlike the methods that require interpolation to correct color misregistration, the advantage of the claimed invention resides in its achievement of its goal without any additional
5 computation, other than would be done routinely as part of image filtering. Thus normal (MTF-specified) filtering and color registration correction are accomplished in a single operation.

These and other aspects, objects, features and advantages of the present invention will be more clearly understood and appreciated from a review
10 of the following detailed description of the preferred embodiments and appended claims, and by reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an overview of the procedure for correcting color
15 misregistration in digital images according to the invention.

FIG. 2 is a diagram of steps involved in the misregistration detection stage shown in Figure 1.

FIG. 3 is a diagram of the procedure for designing an FIR filter useful in the filtering stage shown in Figure 1.

20 FIG. 4 is a diagram of the desired filter MTF for sharpness enhancement.

FIG. 5 is a diagram of the desired filter phase transfer function (PTF) for correcting color misregistration in accordance with the invention.

FIG. 6 is a diagram of the real part of aim filter response for the
25 desired filter MTF and PTF.

FIG. 7 is a diagram of the imaginary part of aim filter response for the desired filter MTF and PTF.

FIG. 8 is a diagram of the MTF of an actual designed 6x6 filter.

FIG. 9 is a diagram of the phase transfer function of an actual
30 designed 6x6 filter.

09406662 "092899
668260" 28997460

FIG. 10 is a perspective diagram of a computer system for implementing the present invention.

DETAILED DESCRIPTION OF THE INVENTION

5 In the following description, a preferred embodiment of the present invention will be described as a software program. Those skilled in the art will readily recognize that the equivalent of such software may also be constructed in hardware. Because image manipulation algorithms and systems are well known, the present description will be directed in particular to algorithms and systems
10 forming part of, or cooperating more directly with, the method in accordance with the present invention. Other aspects of such algorithms and systems, and hardware and/or software for producing and otherwise processing the image signals involved therewith, not specifically shown or described herein may be selected from such systems, algorithms, components and elements known in the
15 art. Given the description as set forth in the following specification, all software implementation thereof is conventional and within the ordinary skill in such arts.

Still further, as used herein, the software program may be stored in a computer readable storage medium, which may comprise, for example; magnetic storage media such as a magnetic disk (such as a floppy disk) or
20 magnetic tape; optical storage media such as an optical disc, optical tape, or machine readable bar code; solid state electronic storage devices such as random access memory (RAM), or read only memory (ROM); or any other physical device or medium employed to store a computer program.

Before describing the present invention, it facilitates understanding
25 to note that the present invention is preferably utilized on any well-known computer system, such a personal computer. Consequently, the computer system will not be discussed in detail herein. It is also instructive to note that the images are either directly input into the computer system (for example by a digital camera) or digitized before input into the computer system (for example by
30 scanning an original, such as a silver halide film).

Referring first to Fig. 10, there is illustrated a computer system 110 for implementing the present invention. Although the computer system 110 is shown for the purpose of illustrating a preferred embodiment, the present invention is not limited to the computer system 110 shown, but may be used on
5 any electronic processing system. The computer system 110 includes a microprocessor-based unit 112 for receiving and processing software programs and for performing other processing functions. A display 114 is electrically connected to the microprocessor-based unit 112 for displaying user-related information associated with the software. A keyboard 116 is also connected to the
10 microprocessor based unit 112 for permitting a user to input information to the software. As an alternative to using the keyboard 116 for input, a mouse 118 may be used for moving a selector 120 on the display 114 and for selecting an item on which the selector 120 overlays, as is well known in the art.

A compact disk-read only memory (CD-ROM) 122 is connected to
15 the microprocessor based unit 112 for receiving software programs and for providing a means of inputting software programs and other information to the microprocessor based unit 112 via a compact disk 124, which typically includes a software program. In addition, a floppy disk 126 may also include a software program, and is inserted into the microprocessor-based unit 112 for inputting the
20 software program. Still further, the microprocessor-based unit 112 may be programmed, as is well known in the art, for storing the software program internally. The microprocessor-based unit 112 may also have a network connection 127, such as a telephone line, to an external network, such as a local area network or the Internet. A printer 128 is connected to the microprocessor-
25 based unit 112 for printing a hardcopy of the output of the computer system 110.

Images may also be displayed on the display 114 via a personal computer card (PC card) 130, such as, as it was formerly known, a PCMCIA card (based on the specifications of the Personal Computer Memory Card International Association) which contains digitized images electronically embodied in the card
30 130. The PC card 130 is ultimately inserted into the microprocessor based unit 112 for permitting visual display of the image on the display 114. Images may

also be input via the compact disk 124, the floppy disk 126, or the network connection 127. Any images stored in the PC card 130, the floppy disk 16 or the compact disk 124, or input through the network connection 127, may have been obtained from a variety of sources, such as a digital camera (not shown) or a scanner (not shown).

Correction of color misregistration is compensation for error introduced during the image acquisition. The error can be influence by optical, electronic and signal processing elements in the imaging path. In order to compensate for misregistration error between color records, it is first necessary to estimate the degree of correction to be applied. This can be measured by acquiring a digital color image for a scene or target having one or more features with known characteristics. In the descriptions that follows, the features of interest are a neutral (having red, green and blue spectral components) registration element or a slanted edge with a moderate to sharp transition on the scale at which the image sampling is to be applied. It is also possible to estimate the amount of color registration from various other image features, such as traditional cross-hairs ('+'), or edges oriented in other ways.

Figure 1 shows three stages of digital image processing involved in the correction of color misregistration. The first stage is a detection stage 1 wherein the amount of misregistration error between the color-records of a digital image is estimated. Two methods for this are discussed below. A second stage 2 includes the design of one or more digital filters with desired MTF (for sharpening, noise reduction, etc.) and PTF (for applying a correction for color misregistration). A third stage 3 includes the application of the designed digital filter to the color-records of the digital image. This latter stage is commonly available in most systems for digital image processing, but not used for the purposes of the claimed invention.

After a digital image is acquired from an original, such as a scene or document, as several fully populated image arrays, the characteristics of the misregistration can be estimated from those records by utilizing one of several detection techniques, as follows. In a first technique for estimating

misregistration, a known feature, e.g., a graphical element in the shape of a '+', is contained in the digital image, and isolation of the pixels corresponding to this element can be analyzed in each color record. The analysis can be used to compute a location statistic. If this statistic is a reliable estimate of the relative position (i.e. (x,y) location) of, say, the center of the '+', then a comparison of the statistic for each color record yields the measure of misregistration.

One approach is to compute a simple centroid of the '+' feature. This is done in one dimension as follows,

$$c(h) = \frac{1}{N} \sum_{i=1}^N ih(i)$$

where $h(i)$ is the N-length array of image pixel data. If computed for both image dimensions, the two centroid coordinates are found. By comparing the centroid coordinates for each color record a measure of translation error is obtained. This is often stated with respect to the coordinates of the green record, e.g.

Record	Misregistration	
	x	y
red	0.27	-0.81
green	0.00	0.00
blue	-0.51	-0.78

in units of pixel distance.

The use of this method with a single feature in the image yields a measure of color record translation. If misregistration includes image rotation or magnification, then it is possible to estimate the extent of these by including the feature at several locations, by comparing the corresponding centroid locations. For example if two features are used, it is possible to estimate a measure rotation and translation by fitting a linear equation to the two sets of loci per color record.

In a second technique for estimating misregistration, a robust measure of color image translation and rotation error can be computed as a natural step of a well-established procedure for the evaluation of digital cameras. The ISO 12233 standard (see also T.A. Fischer and J. Holm, "Electronic Still Picture Camera Spatial Frequency Response Measurement", *Proc. of IS&T 47th Annual Conf./ICPS 1994*, vol. 2, pp. 626-630 (1994) and D. Williams, "Benchmarking of the ISO 12233 slanted-edge spatial frequency response plug-in", *Proc. of IS&T Annual Conf.*, (1998)) for evaluating the spatial frequency response of digital cameras describes the use of a slanted edge target feature. While the ISO 12233 procedure was not intended as a technique for measuring color misregistration, and its use for this purpose is not mentioned or taught in any publication prior to this application, it has been found to provide a robust measure of misregistration. The steps included in the ISO12233 procedure are outlined in Fig. 2, where the edge is assumed to be oriented in a near-vertical direction. In summary, the procedure uses the gradient (initially computed in a step 4) of a slanted edge to derive a super-sampled profile of the edge (stored in data "bins" in step 8) for use in deriving (in a transform step 9) a spatial frequency response via edge gradient analysis. To do so, however, the edge location and direction (in the form of an linear equation) are estimated. Note that at step 6 the equation is fit to the location of the centroid of each line of the edge derivative, as calculated in previous steps 4 and 5. An implementation of this method that provides this fit for each color record is used as a direct measure of edge location within the NxM region of interest (ROI). Specifically, the equation for the linear fit to the set of line centroid data can be expressed as the inverse of the usual linear equation

$$x = a + b (y-1)$$

where x is the x -direction (pixel) location, y the y -direction (line) number [1, 2, ...N] and a , b are constants. The value of a is the location of the edge on the first line of the region of interest (ROI), which in this case is the slanted edge target feature. The value of b gives a measure of the edge slope - an indication of

misregistration due to rotation. Since the ROI is chosen to be identical for each color record, the corresponding values of a and b are expressed in the same coordinates and their difference indicates the degree of misregistration. The above procedure was implemented in software and tested. The results were found to give accurate and reliable estimates of the color record translation error.

A common step in most digital imaging systems is the implementation of a digital filter aimed at manipulating spatial image information, e.g., to selectively enhance certain content to improve perceived sharpness, or suppress other content to reduce noise or artifacts. Digital filters are also used in conjunction with image resampling and compression procedures. The most common digital filter is the symmetrical (or linear phase) Finite Impulse Response (FIR) filter which is implemented as a discrete convolution. The filtered signal is

$$y_{i,j} = \sum_{k=N/2}^{N/2} \sum_{l=-M/2}^{M/2} x_{k,l} h_{i-k,j-l}$$

where $x_{i,j}$ is the input image array and $h_{i,j}$ is the $(N \times M)$ array of filter coefficients. The desired characteristics of the filter are usually specified in the frequency domain and the filter design results in both the size $(N \times M)$ and the values of $\{h\}$ being chosen. There are several methods for designing FIR filters which usually seek to match both a desired (modulus) spatial frequency response, a limited extent (N and M small), and to limit unwanted artifacts such as ringing over scene edges. To understand both the opportunity to design filters with a desired phase response and how this can be used to compensate for color misregistration, it is necessary to review properties of the discrete Fourier transform (DFT).

When we either specify or evaluate the properties of an FIR filter in the spatial frequency domain, we are making use of properties of the DFT. The duality of convolution and multiplication between the spatial and frequency domains makes this possible. The Fourier transform of a (real) function is in

general a complex function. Since it has a real and imaginary part at each frequency, we can also represent these as a modulus and phase (angle),

$$mod(Y(u)) = \sqrt{\text{real}(Y(u))^2 + \text{imag}(Y(u))^2}$$

$$phase(Y(u)) = \arctan\left(\frac{\text{imag}(Y(u))}{\text{real}(Y(u))}\right)$$

5

where $Y(u)$ is a complex function. If we design an FIR filter whose coefficients are symmetrical about its center coefficient, then the result is a simple shift of the image record. This is usually a good thing when applied to all color records, particularly if we have no reason to introduce a frequency-dependent phase shift into the output image. One phase modification is of interest, however, and it is motivated by a property of the Fourier transform.

10

The Fourier transform of a shifted function is

$$F[y(x-b)] = Y(u)e^{-2ib\pi u}$$

15

where b is the shift (translation of $+b$) applied to $y(x)$, F indicates the Fourier transform, $Y(u)$ is the transform of the unshifted function, and u is the spatial frequency coordinate and $i = \sqrt{-1}$. We can express the effect of the shift in terms of a linear filter in the frequency domain as a multiplication by $e^{-2ib\pi u}$.

20 Expressing this in trigonometric notation and applying the above definition for the phase of a complex function results in simple translation being equivalent to a filter with,

$$\text{modulus: } |Y(u)| = 1$$

25

$$\text{phase: } \phi(Y(u)) = -2\pi bu$$

09406882-09299

This implies that if we can design a digital filter with a phase response of $2\pi bu$, it would be possible to compensate for the shift in the original signal.

Figure 3 shows the steps of a filter design procedure, which is implemented in software and based on the DFT. Based on the desired filter MTF,

5 a large (interpolated if needed) array is used in a step 20 to store the desired modulus. The phase function corresponding to the desired shift (x,y) is then computed in a step 22. A third complex array is used in a step 24 to store the corresponding real and imaginary parts of the desired filter response. The inverse DFT is computed in a step 26 to give an initial filter design, which is then

10 truncated in step 28 to a desired filter size. The MTF and PTF of this initially designed filter are then evaluated in step 30 using a DFT of the zero-padded version of the filter. Based on an evaluation of the resulting filter response in step 32, the array can then be multiplied by a window function in step 34, which will tend to smooth the spatial frequency response. Note that the application of a

15 window function should be done so as not to change the symmetry that will be evident in the filter about its shifted origin. Additional designs based on varying the filter size can also be compared, and a final filter stored in step 36. The above procedure can be repeated for each color-record (15). Note that for one color-record, taken as the reference record, no shift is needed, so a zero-phase filter will

20 be designed. This is easily accomplished in the procedure by, since the desired shift for this color-record will be zero at the output of stage 1 in Fig. 1.

One of the advantages of the invention is that misregistration and sharpness enhancement can be dealt with together: that is, color misregistration data can be applied to define a *desired phase response* of a digital FIR filter and

25 MTF data can be applied to define a *desired magnitude(modulus) response* of a digital FIR filter for each color record of the digital image. Consequently, one FIR filter can be designed with both a desired modulus (MTF) response *and* a color-specific phase response. Thus, unlike the methods that require interpolation to correct color misregistration, the advantage of the claimed invention resides in

30 its achievement of its goal without any additional computation, other than would be done routinely as part of conventional image filtering. Thus normal (MTF-

09406622 092899
668260 28890460

specified) filtering and color registration correction are accomplished in a single operation. In the design process, two sets of coefficients may be derived (effectively, two digital filters) and the final digital filter may be obtained by convolving the first digital filter having a phase response that compensates for the shift with the second digital filter having a magnitude response that compensates for an aspect of the digital color records other than the shift (such as sharpness). If the possible desired shifts are finite in number (e.g., $\{-0.5, 0, 0.5\}$), the first digital filter may use a set of precalculated coefficients selected, once the shift is known, from a plurality of sets precalculated for various pixel shifts.

10

EXAMPLE

A filter design was specified to include sharpness enhancement defined by an aim MTF that peaked at 3.0 in the v (y) direction, and with a low-pass characteristic in the u (x) direction. In addition, an image shift of +0.5 (pixels) in the x direction was specified. The modulus and phase responses are shown in Figs. 4 and 5.

15

The next step is to populate a complex array with the real and imaginary parts that correspond to the above aim responses. The required symmetry in the Fourier domain (to yield a real FIR filter) has to be observed, however. This is shown in Figures 6 and 7. A 6x6 size filter was designed using the above techniques and no smoothing window function. The filter coefficients are

20

$$\begin{bmatrix} -0.028 & -0.12 & -0.34 & -0.12 & -0.028 & -0.018 \\ -1. & -4.4 & -12. & -4.4 & -1. & -0.66 \\ 1.8 & 7.9 & 22. & 7.9 & 1.8 & 1.2 \\ 1.8 & 7.9 & 22. & 7.9 & 1.8 & 1.2 \\ -1. & -4.4 & -12. & -4.4 & -1. & -0.66 \\ -0.028 & -0.12 & -0.34 & -0.12 & -0.028 & -0.018 \end{bmatrix}.$$

25

The filter characteristics achieved, shown in Figs. 8 and 9, compare well with the desired MTF and PTF, given in Figures 4 and 5.

The invention has been described with reference to a preferred embodiment. However, it will be appreciated that variations and modifications can be effected by a person of ordinary skill in the art without departing from the scope of the invention. In particular, it will be noted that the claimed invention

5 can be applied to any multi-record wavelength dependent digital image. The records could, for example, represent:

- red, green, blue color records
 - cyan, magenta and yellow color records,
 - cyan, magenta, yellow and black color records
- 10 - ultraviolet, visible, near infra-red, and far infra-red, or other wavelength-dependent records.

1568260" 28890460

PARTS LIST

- 1 detection stage
- 2 digital filter design stage
- 3 digital filtering stage
- 4 gradient step
- 5 centroid step
- 6 equation fitting step
- 7
- 8 data storage step
- 9 transform step
- 20 modulus storage step
- 22 phase function calculation
- 24 real and imaginary storage
- 26 inverse DFT computation
- 28 truncation
- 30 DFT computation
- 32 response evaluation
- 34 window function
- 36 filter storage
- 38 feedback loop
- 39 computer system
- 112 microprocessor-based unit
- 114 display
- 116 keyboard
- 118 mouse
- 120 selector
- 122 CD-ROM
- 124 CD
- 126 floppy disk
- 127 network connection
- 128 printer

09406660 28890760

130 PC card

0940633 09239
1568250 " 28890460

WHAT IS CLAIMED IS:

1. A method for improving the wavelength dependent registration of digital images, said method comprising the steps of:
 - (a) detecting a similar feature in two or more digital records of the same original search digital record being wavelength-dependent;
 - (b) determining from the feature a shift due to misregistration of at least one of the digital records relative to another of the digital records; and
 - (c) processing said at least one of the digital records with a digital filter having a phase response that compensates for the shift, thereby providing a correction for the wavelength-dependent misregistration between the digital records.
2. A method as claimed in claim 1 wherein step (a) comprises detecting a graphical element in each of the digital records.
3. A method as claimed in claim 2 wherein step (b) comprises computing a centroid of the graphical element.
4. A method as claimed in claim 1 wherein step (a) comprises detecting an edge feature in each of the digital records.
5. A method as claimed in claim 4 wherein step (a) further comprises elements of the spatial frequency response method for a slanted edge feature according to the ISO 12233 standard.
6. A method as claimed in claim 4 wherein step (b) comprises computing a difference in pixel location of the feature located in said at least one digital record relative to the same feature located in said another of the digital records.

552250" 28990460

7. A method as claimed in claim 1 wherein step (c) comprises processing the digital records with an FIR filter having an asymmetric response represented by a set of filter coefficients.

8. A method as claimed in claim 7 wherein step (c) comprises using a set of precalculated coefficients selected from a plurality of sets precalculated coefficients for various pixel shifts.

9. A method as claimed in claim 1 wherein step (c) comprises processing said at least one of the digital records with digital filter having a magnitude response that compensates for an aspect of the digital records other than misregistration.

10. A method as claimed in claim 1 wherein the digital filter in step (c) is obtained by convolving a first digital filter having a phase response that compensates for the shift with a second digital filter having a magnitude response that compensates for an aspect of the digital records other than the shift.

11. A method as claimed in claim 10 wherein the second digital filter in step (c) enhances the sharpness of, or blurs the one or more of the digital records.

12. A method as claimed in claim 1 wherein the digital records are red, green and blue records.

13. A method as claimed in claim 12 wherein said another of the records in step (b) is the green color record and the red and blue color records are filtered in step (c) to correct for color misregistration between the red and blue color records and the green color record.

09406662 092609

14. A computer program product for improving the color registration of digital images comprising: a computer readable storage medium having a computer program stored thereon for performing the steps of:

- (a) detecting a similar feature in two or more digital color records of the same scene;
- (b) determining from the feature a shift due to misregistration of at least one of the digital color records relative to another of the digital color records; and
- (c) processing said at least one of the digital color records with a digital filter having a phase response that compensates for the shift, thereby providing a correction for the color misregistration between the digital color records.

15. A computer program product as claimed in claim 14 wherein step (a) comprises detecting a graphical element in each of the digital records.

16. A computer program product as claimed in claim 15 wherein step (b) comprises computing a centroid of the graphical element.

17. A computer program product as claimed in claim 14 wherein step (a) comprises detecting an edge feature in each of the digital color records.

18. A computer program product as claimed in claim 17 wherein step (a) further comprises evaluating the location of a slanted edge feature according to the ISO 12233 standard.

19. A computer program product as claimed in claim 17 wherein step (b) comprises computing a difference in pixel location of the feature

09406002 09289

located in said at least one digital color record relative to the same feature located in said another of the digital color records.

20. A computer program product as claimed in claim 14 wherein step (c) comprises processing the digital color records with an FIR filter not constrained to a symmetrical array, represented by a set of filter coefficients.

21. A computer program product as claimed in claim 20 wherein step (c) comprises using a set of precalculated coefficients selected from a plurality of sets precalculated for various pixel shifts.

22. A computer program product as claimed in claim 14 wherein step (c) comprises processing said at least one of the digital color records with digital filter having a magnitude response that compensates for an aspect of the digital color records other than misregistration.

23. A computer program product as claimed in claim 14 wherein the digital filter in step (c) is obtained by convolving a first digital filter having a phase response that compensates for the shift with a second digital filter having a magnitude response that compensates for an aspect of the digital color records other than the shift.

0940632-0000

ABSTRACT

A method for improving the wavelength dependent registration of digital images includes the steps of (a) detecting a similar feature in two or more digital records of the same scene, (b) determining from the feature a shift due to misregistration of at least one of the digital records relative to another of the digital records, and (c) processing the shifted digital record(s) with a digital filter having a phase response that compensates for the shift, thereby providing a correction for the wavelength dependent misregistration between the digital records.

658260" 28890750

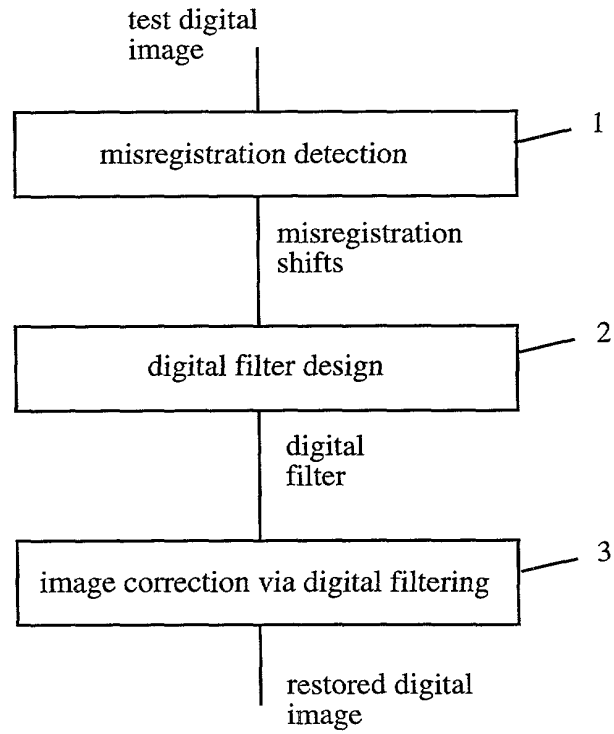


Figure 1: Procedure for correction of color-misregistration in digital images.

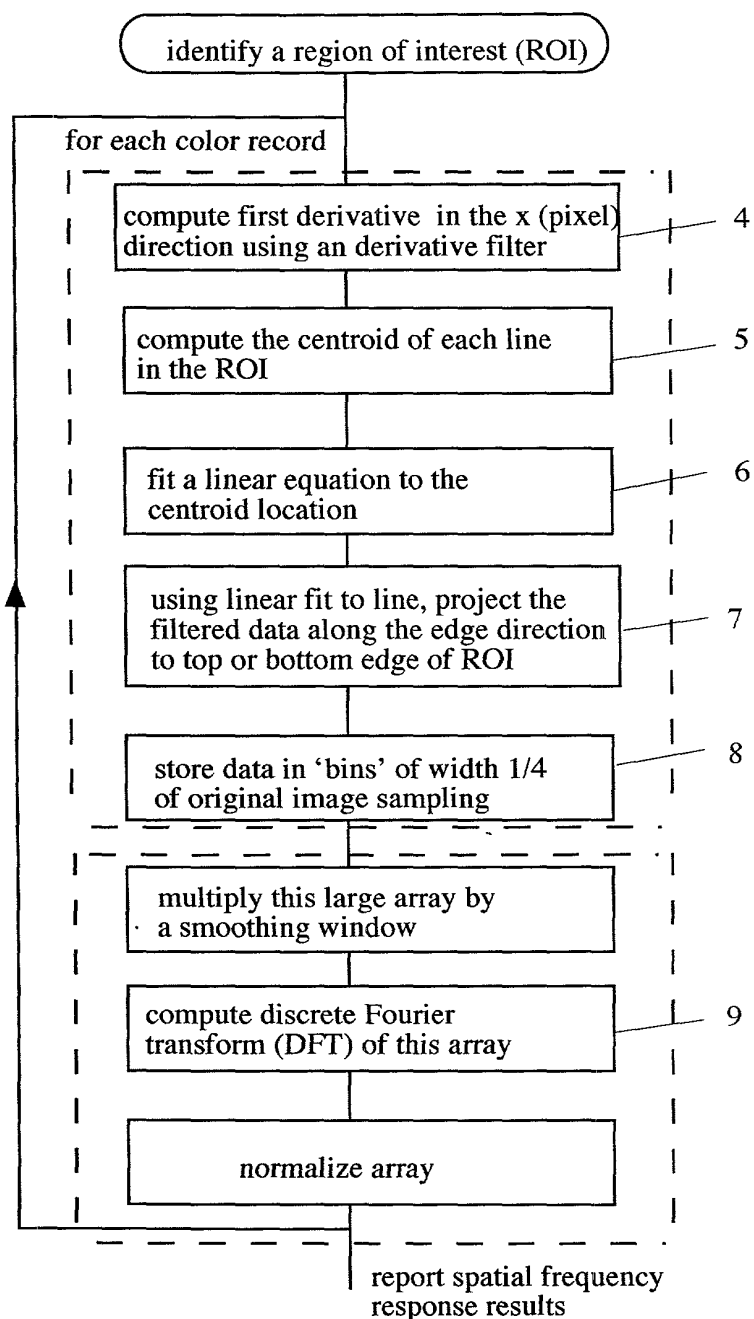


Figure 2: Outline of ISO 12233 spatial frequency response evaluation. The edge is assumed to be oriented in a near-vertical direction.

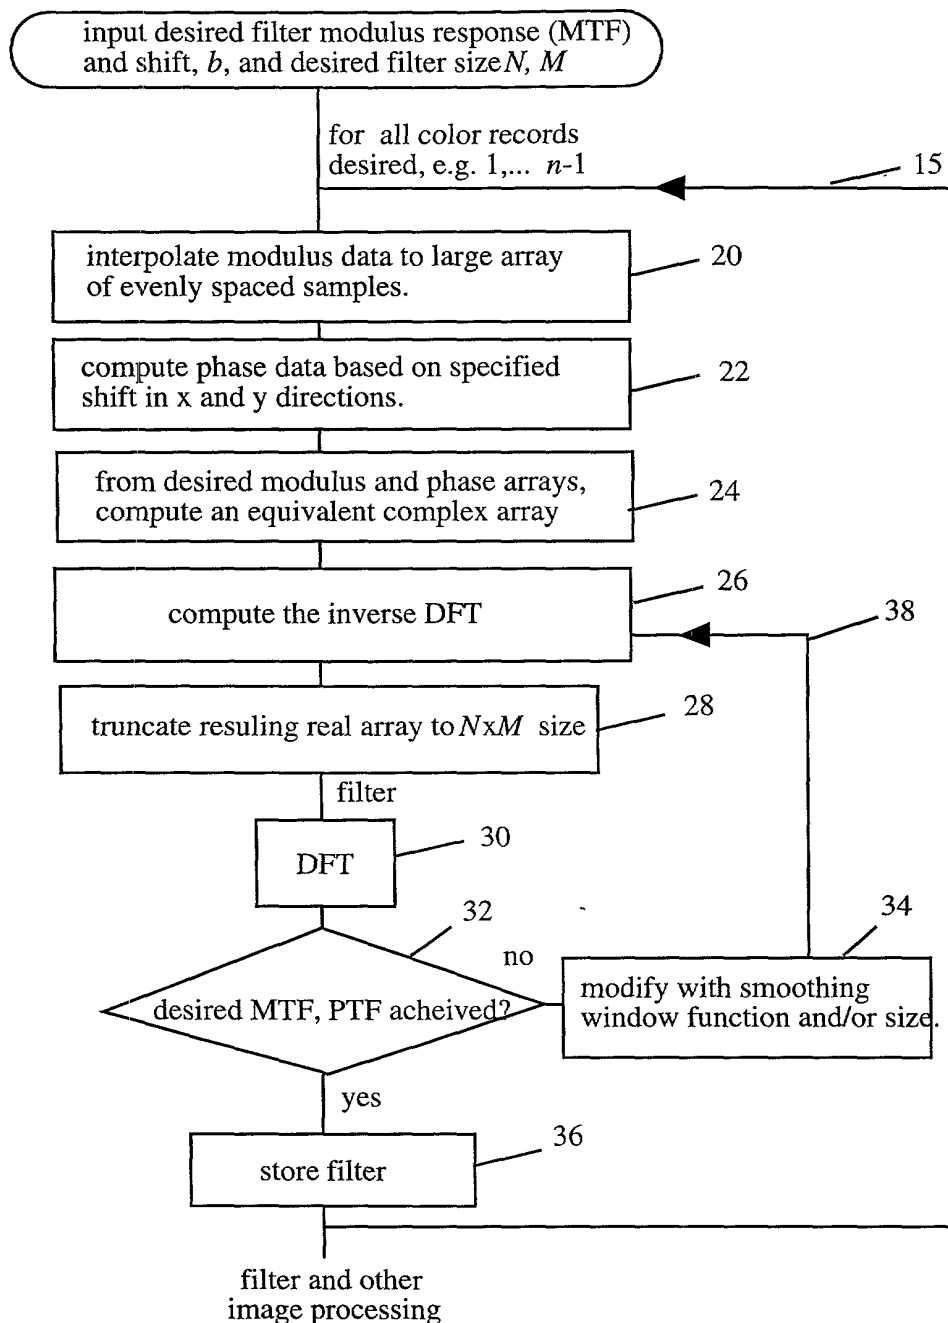


Figure 3: FIR filter design based on modulus and phase response.

658260" 28890460

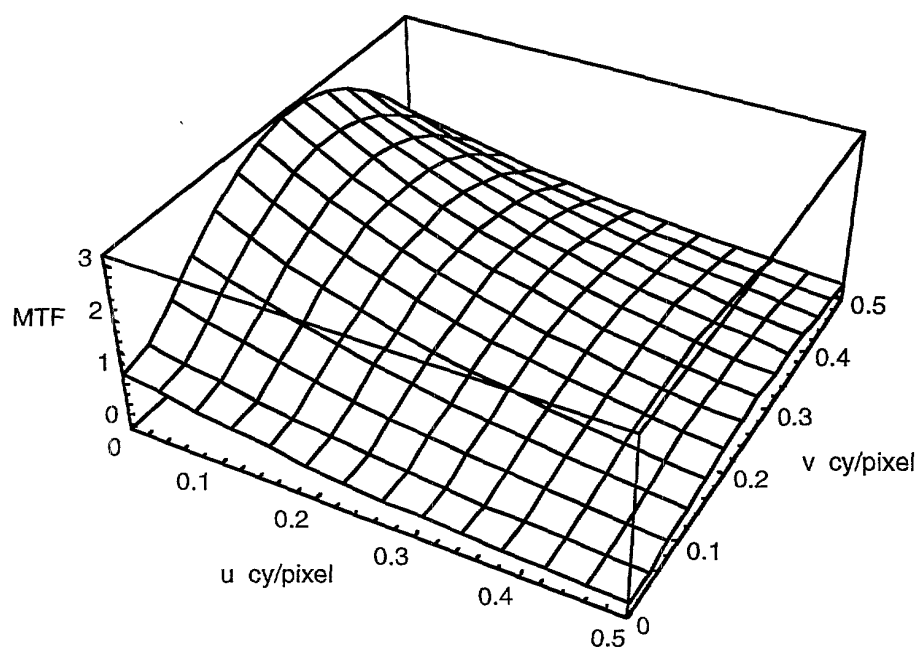


Figure 4: Desired filter MTF.

A 3D plot showing the Point Transfer Function (PTF) as a function of spatial frequencies u and v in cycles per pixel (cy/pixel). The vertical axis is labeled PTF and ranges from -1 to 0. The horizontal axes are labeled u cy/pixel and v cy/pixel, both ranging from 0 to 0.5. The surface is a flat grid at PTF = 0, indicating no phase shift across the measured range of spatial frequencies.

Figure 5: Desired filter Phase Transfer Function (PTF).

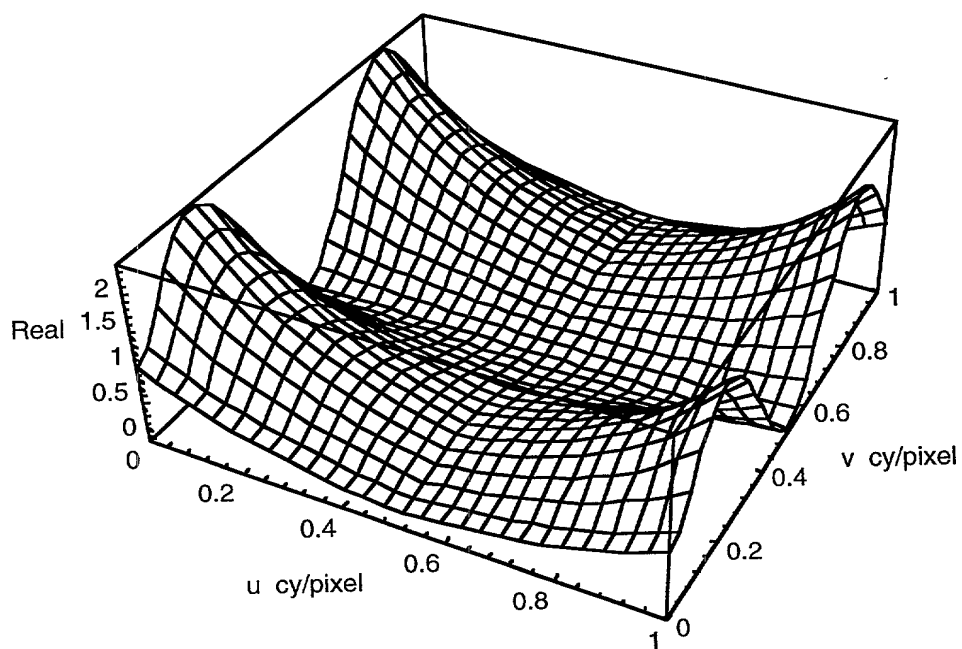


Figure 6: Specified real part of the aim filter response.

0940682 09289
662260 " 28890460

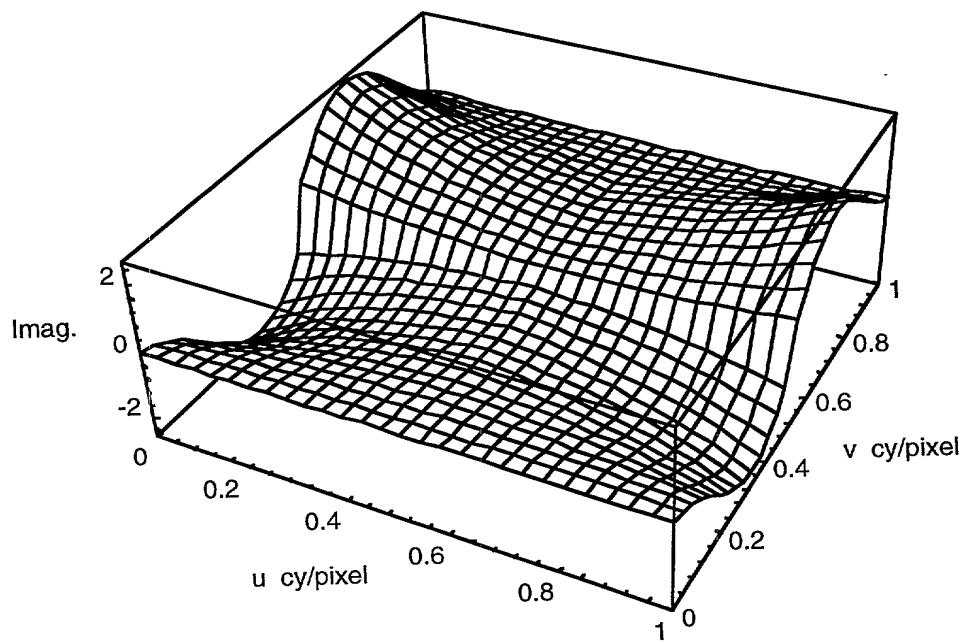


Figure 7: Specified imaginary part of the aim filter response.

668260" 28890460

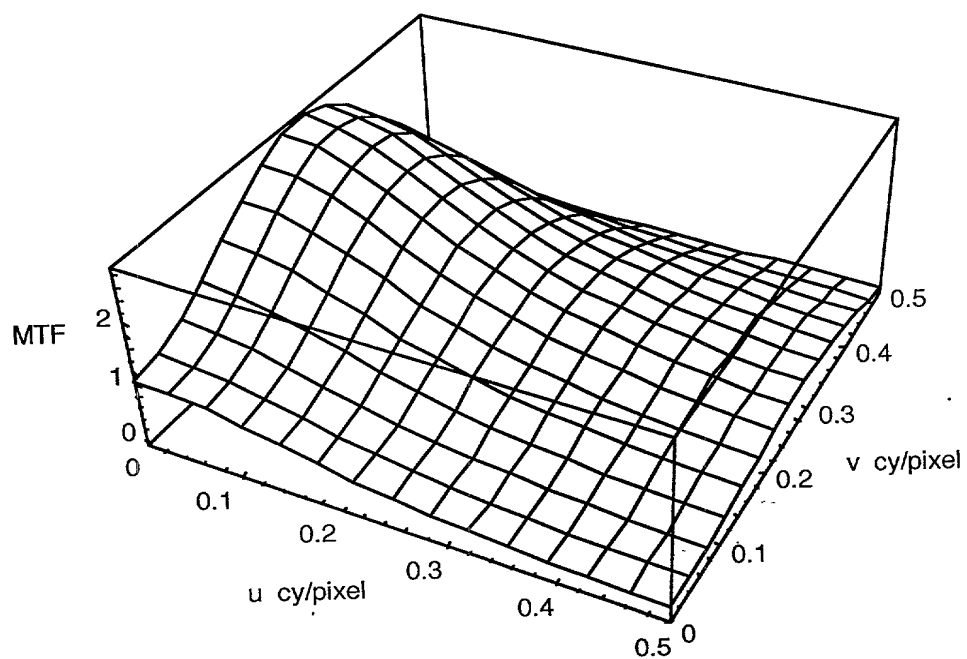


Figure 8: MTF of the 6x6 digital filter.

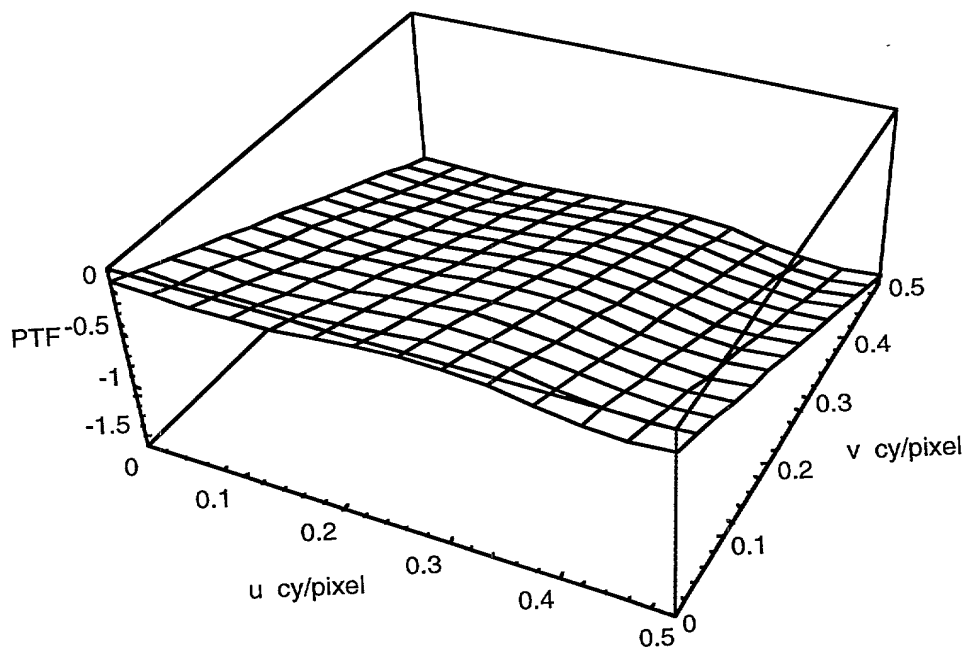


Figure 9: PTF of the 6x6 digital filter.

668260" 28890450

662260" 2890760

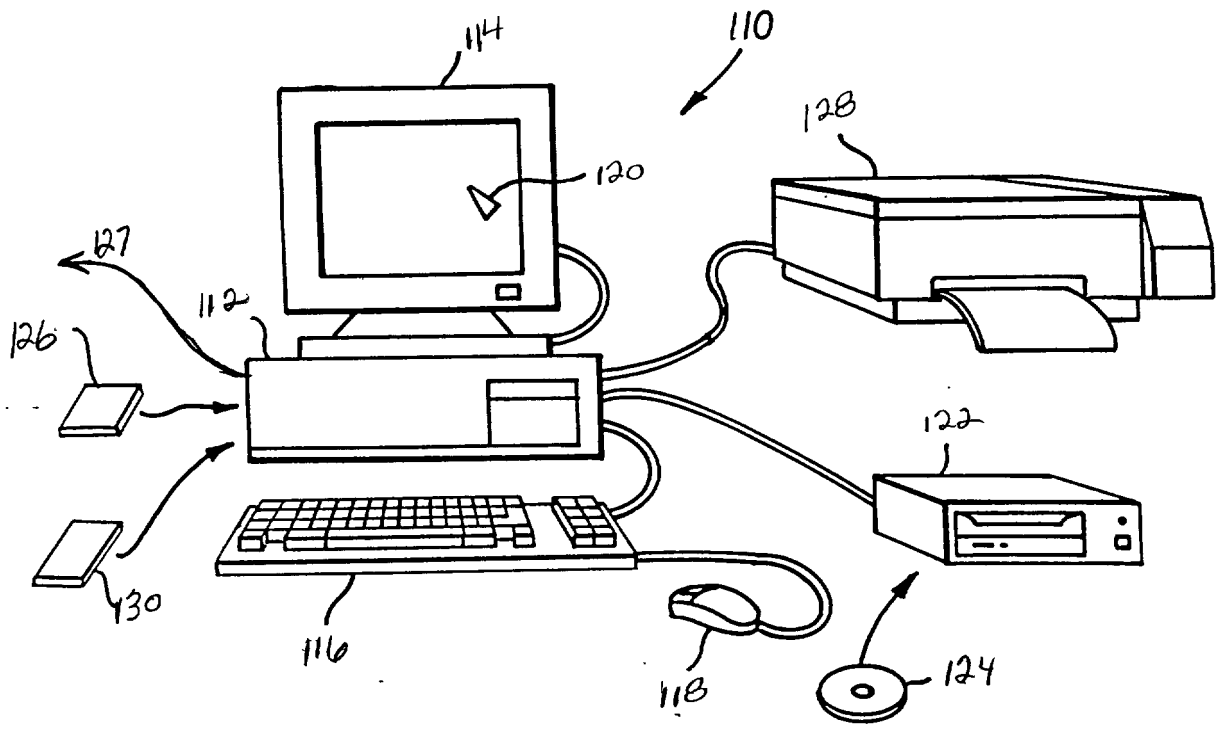


FIG. 10

Combined Declaration For Patent Application and Power of Attorney

ATTORNEY DOCKET
78515DMW

As below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

IMAGE PROCESSING FOR IMPROVEMENT OF COLOR REGISTRATION IN DIGITAL IMAGES

The specification of which (check only one item below):

☒ is attached hereto.☐ was filed as United States Application Serial No. on and
was amended on (if applicable).☐ was filed as PCT international application Number on and was amended under PCT Article 19 on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent & Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign applications(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (if PCT, indicate PCT)	APPLICATION NUMBER	DATE OF FILING (day month year)	PRIORITY CLAIMED UNDER 35 USC §119			
				YES		NO
				YES		NO
				YES		NO

I hereby claim the benefit under Title 35, United States Code, 119 §(e) of any United States provisional application(s) listed below:


PRIOR PROVISIONAL APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119 (e):

PROVISIONAL APPLICATION NUMBER	FILING DATE
60/102,786	02 October 1998

I hereby claim the benefit under Title 35, United States Code, §120 of any prior United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, §112, I acknowledge the duty to disclose to the U.S. Patent & Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR US APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S FOR BENEFIT UNDER 35 USC §120:

U.S. APPLICATIONS			STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE		PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.					
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)			

Combined Declaration For Patent Application and Power of Attorney (Continued)			ATTORNEY DOCKET 78515DMW	
POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (<i>List name and registration number</i>)				
David M. Woods, Registration No. 27,171 Thomas H. Close, Registration No. 27,428 J. Lanny Tucker, Registration No. 27,678 Sarah Meeks Roberts, Registration No. 33,447 Milton S. Sales, Registration No. 24,516				
Send Correspondence to: Thomas H. Close Eastman Kodak Company Patent Legal Staff Rochester, NY 14650-2201			Direct Telephone Calls to: <i>(name and telephone number)</i> David M. Woods (716) 477-5256 FAX: (716) 477-4646	
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
1	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
2	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
3	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
4	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
5	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
6	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.				
SIGNATURE OF INVENTOR 201		SIGNATURE OF INVENTOR 202		SIGNATURE OF INVENTOR 203
				
DATE		DATE		DATE
28 Sept. 1999				
SIGNATURE OF INVENTOR 204		SIGNATURE OF INVENTOR 205		SIGNATURE OF INVENTOR 206
DATE		DATE		DATE

0940990222666